


Type G500R

Manufactured of heat treated extruded aluminum alloy 6063-T-6, filled with a mixture of virgin aluminum oxide and silicon carbide abrasive granules in an epoxy binder.

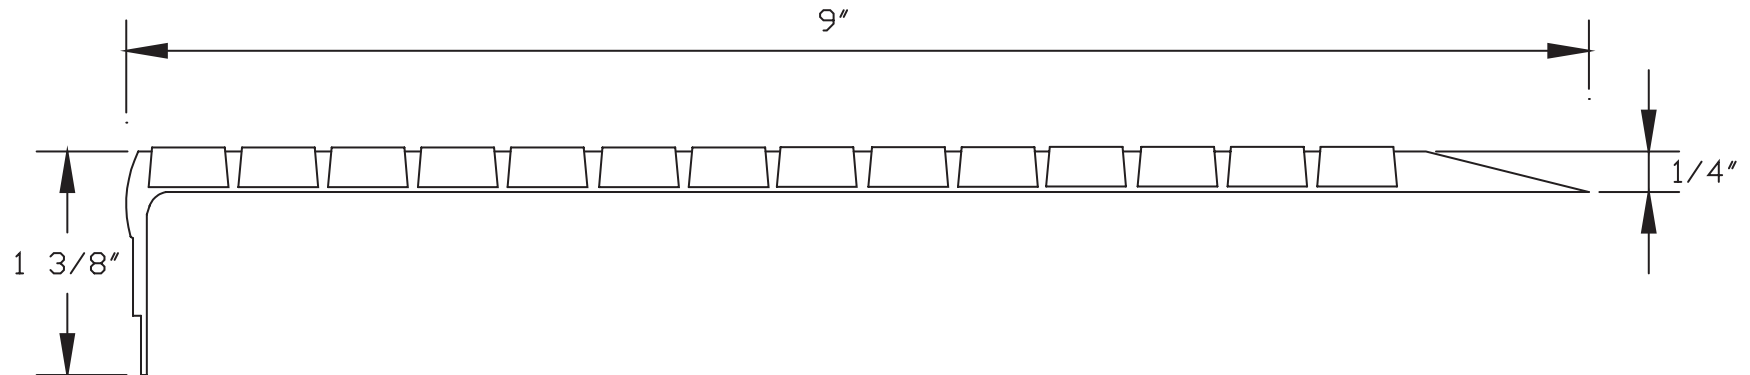

BILL OF MATERIAL

QUANTITY	LENGTH	LOCATION
VISION LINE		

COLOR CHOICES

- BLACK
- SAFETY YELLOW
- BROWN
- BLUE
- SAFETY ORANGE
- GREY
- GREEN
- RED
- BUFF
- BURGUNDY
- SAFETY GLOW

CUSTOMER:

PROJECT:

PO#:

DATE:

AMERICAN SAFETY TREAD CO., INC. • PO BOX 611 • HELENA, AL 35080

Phone: 800.245.4881 • 205.664.0511 • Fax: 205.663.9610

sales@americansafetytread.com • www.americansafetytread.com

