


Type SG505R

Manufactured of heat treated extruded aluminum alloy 6063-T-6, filled with a mixture of virgin aluminum oxide and silicon carbide abrasive granules in an epoxy binder.

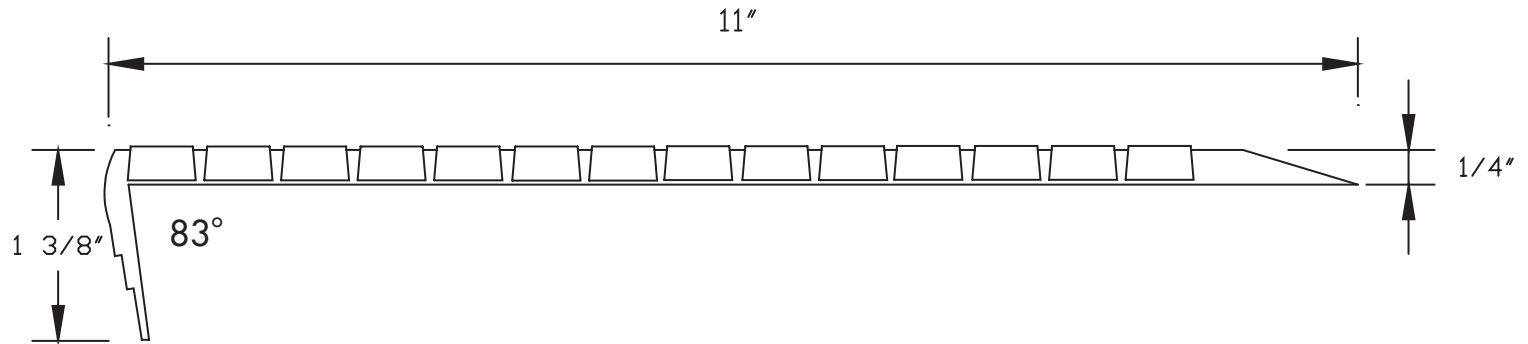

BILL OF MATERIAL

QUANTITY	LENGTH	LOCATION
VISION LINE		

COLOR CHOICES

BLACK
 SAFETY YELLOW
 BROWN
 BLUE
 SAFETY ORANGE
 GREY
 GREEN
 RED
 BUFF
 BURGUNDY
 SAFETY GLOW

CUSTOMER:

PROJECT:

PO#:

DATE:

AMERICAN SAFETY TREAD CO., INC. • PO BOX 611 • HELENA, AL 35080

Phone: 800.245.4881 • 205.664.0511 • Fax: 205.663.9610

sales@americansafetytread.com • www.americansafetytread.com

