


# Type G505R

Manufactured of heat treated extruded aluminum alloy 6063-T-6, filled with a mixture of virgin aluminum oxide and silicon carbide abrasive granules in an epoxy binder.

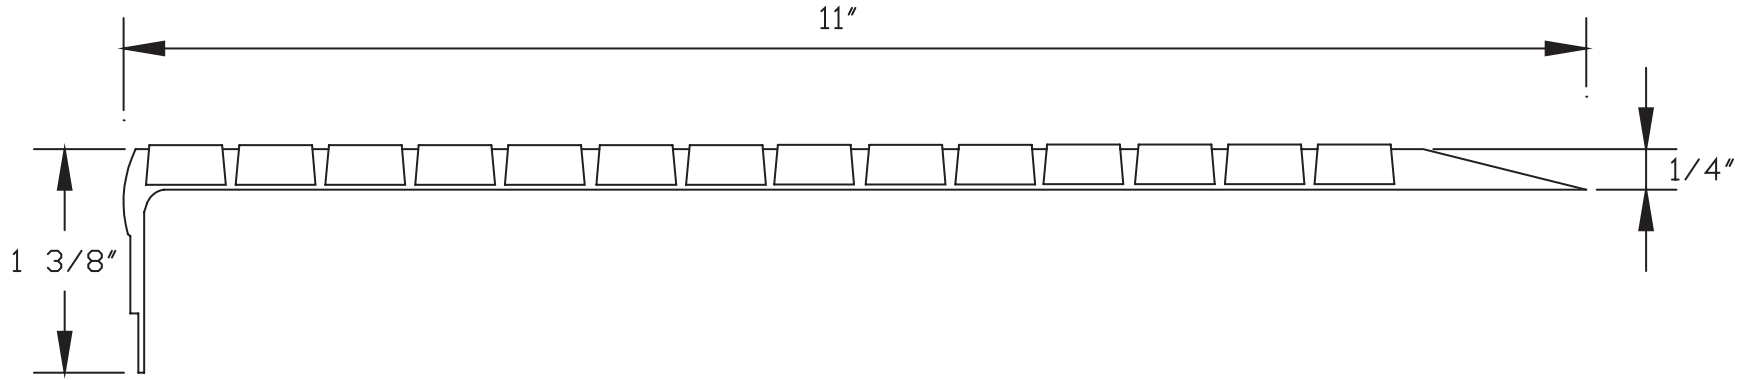

BILL OF MATERIAL		
QUANTITY	LENGTH	LOCATION
VISION LINE		

- COLOR CHOICES**
- BLACK
  - SAFETY YELLOW
  - BROWN
  - BLUE
  - SAFETY ORANGE
  - GREY
  - GREEN
  - RED
  - BUFF
  - BURGUNDY
  - SAFETY GLOW

**CUSTOMER:**

**PROJECT:**

**PO#:**

**DATE:**

**AMERICAN SAFETY TREAD CO., INC.** • PO BOX 611 • HELENA, AL 35080  
 Phone: 800.245.4881 • 205.664.0511 • Fax: 205.663.9610  
 sales@americansafetytread.com • www.americansafetytread.com

